

- Plastic housing Ø 54 mm
- Rated operating distance (S_n) 55 mm
- ProxiPlus technology for higher operating distance
- Optimal detection of small objects
- PNP normally open + normally closed
- Plug S4 (M12x1 A)





Product Characteristics


| | |
|-------------------|---|
| Type | IPH 055.38 G S4 |
| Connection | Art.-No. |
| Plug S4 (M12x1 A) | 2502A |
| Application | Non-contact detection of metallic objects |

Technical Data

| | |
|------------------------------------|-------------------------------------|
| Rated operating distance (S_n) | 55 mm |
| Target steel St37, 1 mm thick | 165 x 165 mm |
| Operating distance adjustable | yes |
| Switching hysteresis (H) | 1 - 15 % |
| Location at metal | non flush |
| Supply voltage (U_B) | 10 - 55 V DC |
| Ripple voltage | max. 15 % |
| Output | PNP normally open + normally closed |
| Continuous current | 0 - 400 mA |
| Short-circuit protection | yes, pulsing |
| No-load current (I_0) | < 10 mA |
| Voltage drop (U_d) | < 2 V |
| Operating frequency (f) | 50 Hz |
| Ambient temperature | -25 ... +70 °C |
| Protection class | IP 67 |
| Housing material | plastic |
| Functional display | LED |

Connection

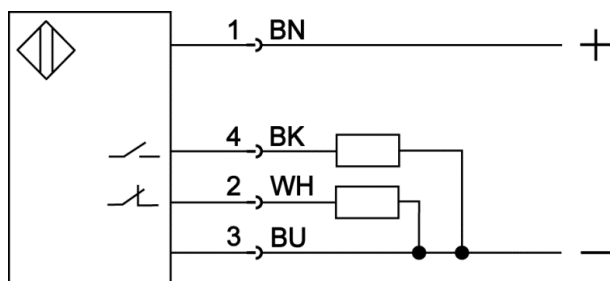

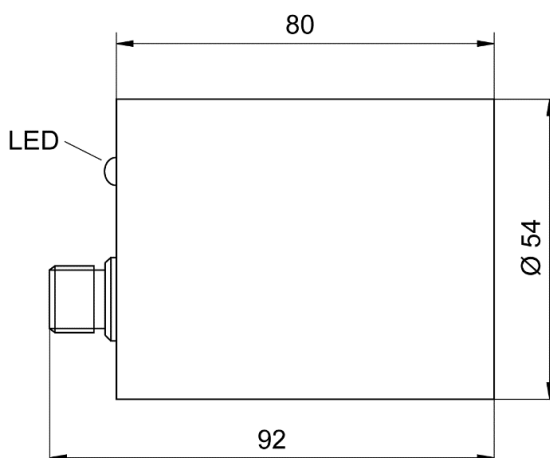Dimension (mm)

Accessories (in scope of supply)

| | Type | Art.-No. |
|---|------|----------|
| - | - | - |

Accessories (not in scope of supply)

| | Type | Art.-No. |
|---|------------|----------|
| Mounting clamp PP/steel, +90 °C | HH 3 | 9815A |
| Female plug S4 (M12 x 1 A), straight, can be assembled, 4 wire | ST040G | 9842D |
| Female plug S4 (M12 x 1 A), angular, can be assembled, 4 wire | ST040 | 9841A |
| Connection cable 2 m, 4 wire, with straight female plug S4 (M12 x 1 A) | ST043/4-2 | 9851I |
| Connection cable 5 m, 4 wire, with straight female plug S4 (M12 x 1 A) | ST043/4-5 | 9841T |
| Connection cable 10 m, 4 wire, with straight female plug S4 (M12 x 1 A) | ST043/4-10 | 9850J |
| Connection cable 2 m, 4 wire, with angular female plug S4 (M12 x 1 A) | ST041/4-2 | 9841D |
| Connection cable 5 m, 4 wire, with angular female plug S4 (M12 x 1 A) | ST041/4-5 | 9841E |
| Connection cable 10 m, 4 wire, with angular female plug S4 (M12 x 1 A) | ST041/4-10 | 9841S |

Further information

| | Document |
|------------------|------------|
| Operating manual | BDA_IK_D_E |