

- Plastic housing M30 x 1,5
- Monitoring range 5-6000 pulses/minute
- Switchable function modes
- Rated operating distance (S_n) 15 mm
- PNP normally open + normally closed
- Plug S4 (M12x1 A)
- IP 68





Product Characteristics


Type	IDLB 015.38 G S4
Connection	Art.-No.
Plug S4 (M12x1 A)	2473E
Application	Non-contact monitoring of rotating or linear movements

Technical Data

Monitoring range	5-6000 pulses/minute
Setpoint adjustment	Teach-In
Function modes (switchable)	1. Underspeed monitoring 2. Overspeed/underspeed monitoring of a defined range ("good window")
Start-up delay	0 - 120 seconds
Rated operating distance (S_n)	15 mm
Target steel St37, 1 mm thick	45 x 45 mm
Operating distance adjustable	no
Switching hysteresis (H)	1 - 15 %
Location at metal	non flush
Supply voltage (U_B)	10 - 55 V DC
Ripple voltage	max. 15 %
Output	PNP normally open + normally closed
Continuous current	0 - 400 mA
Short-circuit protection	yes, pulsing
No-load current (I_0)	< 10 mA
Voltage drop (U_d)	< 2 V
Ambient temperature	-25 ... +80 °C
Protection class	IP 68
Housing material	plastic
Functional display	LED

Connection

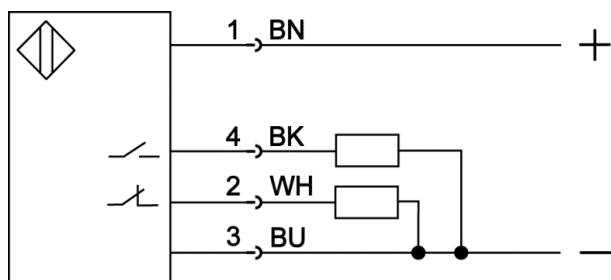

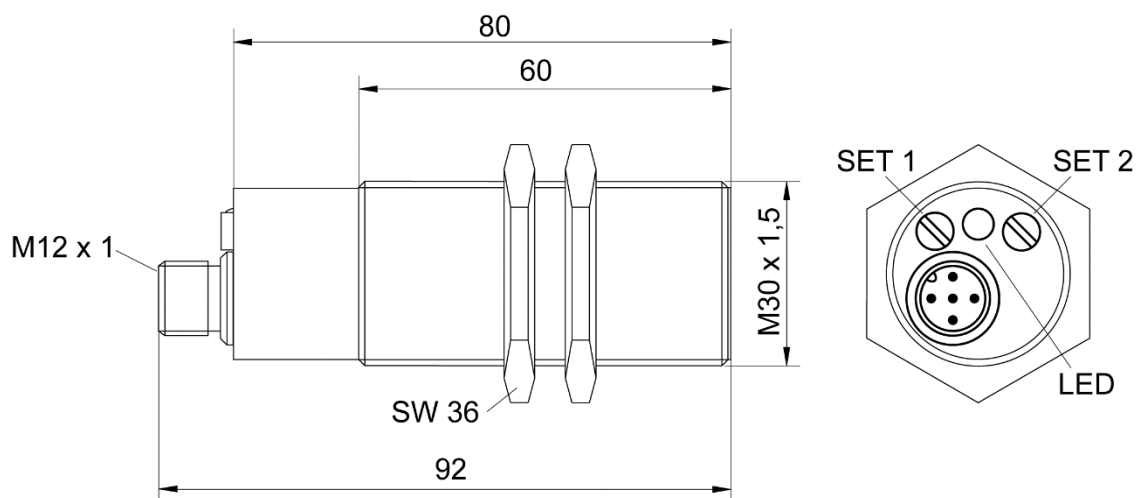Dimension (mm)

Accessories (in scope of supply)

	Type	Art.-No.
Plastic nut M30 x 1,5 (2 pieces)	HL 1	9848A

Accessories (not in scope of supply)

	Type	Art.-No.
M30 Mounting clamp with ball joint	HM 5	9816E
Female plug S4 (M12 x 1 A), straight, can be assembled, 4 wire	ST040G	9842D
Female plug S4 (M12 x 1 A), angular, can be assembled, 4 wire	ST040	9841A
Connection cable 2 m, 4 wire, with straight female plug S4 (M12 x 1 A)	ST043/4-2	9851I
Connection cable 5 m, 4 wire, with straight female plug S4 (M12 x 1 A)	ST043/4-5	9841T
Connection cable 10 m, 4 wire, with straight female plug S4 (M12 x 1 A)	ST043/4-10	9850J
Connection cable 2 m, 4 wire, with angular female plug S4 (M12 x 1 A)	ST041/4-2	9841D
Connection cable 5 m, 4 wire, with angular female plug S4 (M12 x 1 A)	ST041/4-5	9841E
Connection cable 10 m, 4 wire, with angular female plug S4 (M12 x 1 A)	ST041/4-10	9841S

Further information

	Document
Operating manual	BDA IDLB 38_D_E