


Short circuit protected proximity switch with terminal chamber and convertible cable input for PG9 cable hose screwing 5/16".

4-wire connection with PNP normally open and normally close output and Proxi-Teach function

The sensor recognises the existing installation conditions after the key is pressed, and adjusts the operating distance optimally.

Teach - In
Funktion

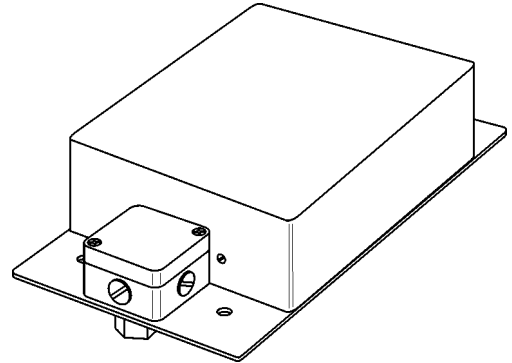

Technical Data

Type	IKUR 215T.38 MG
Art.-No.	2365K
Rated operating distance (S _n)	120 mm
Output	PNP n. o. + n. c.
Operating distance adjustable	Teach In*
Target steel St37, 1mm thick	280 x 150 mm
Location at metal	non flush
Supply voltage (U _B)	10 - 80 V DC
Ripple voltage	max 15 %
Load current max.	0 - 400 mA
Short-time load current	2 A / 10 ms 0,8 A / 100 ms
Short circuit protection	yes, pulsing
Voltage drop (U _d)	< 2 V
No-load current (I ₀)	< 10 mA
Switching frequency (f)	50 Hz
Switching hysteresis (H)	1 - 15 %
Ambient temperature	-25 ... +80 °C
Protection class	IP 67** (terminal chamber IP 65)
Connection	Terminal chamber with M16 / 5/16" cable hose screwing
Function display	Duo LED red / green
Housing material	Plastic PBT with Al assembly plate

*The teach-in function enables usage under non-standard conditions such as, for example, partly flush installation. For further setting information see PIA002

**The protection class is complied with when the protection screw for the adjusting device is screwed in.

Diagram of Connections

