

Piros S is for non contact temperature measurement of metal materials. Having adjustable emissivity, response time and measuring range the sensor can be flexible used for many applications

analog
4 - 20 mA



Technical Data

Type	OKS 2 GA13.14 S9
Art.-No.	6920D
Measuring temperature range	250 - 1300 °C
Spectral range	1,5 ... 1,8 µm
Output	4 – 20 mA
Measuring failure	0,5 %
Response time t95% min / max.	10 msec. / 10 sec.
Detected surface at 290 mm	Ø 3 mm
Emissivity adjustable	0,05...1,00
Integrated LED pilot light*	yes (12 – 30 V DC)
Integrated MAX data storage	yes
Service Interface USB	yes
Load impedance	< 700 Ohm (24 V)
Supply voltage stabilized	24 V DC +/- 25 %
Ripple voltage	< 50 mV
Power consumption	≤ 0,6 W
Power consumption pilot light	≤ 35 mA
Ambient temperature	0 to +70 °C
Protection class	IP 65
Connection	Plug S9
Supply voltage display	LED
Housing material	stainless steel
Accessories	Art.-No.
(not included in the scope of supply)	
Connection cable 2m, ST S9/5-2	9847B
Cooling jacket DAK 302	6913B
Mounting clamp DAK 305	6913E

*switchable if needed

The emissivity, the response time as well as the measuring subrange may be adjusted with optional PC service software and PC-adapter cable.

Distance (a) / Measuring point diameter

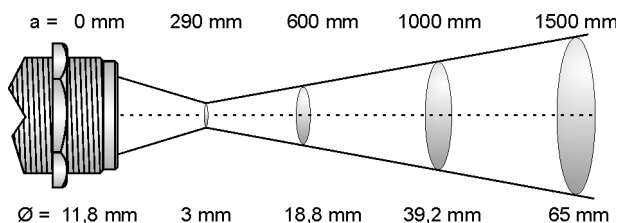


Diagram of connections

